


Ingegneria

Gigliò Moroder®
production

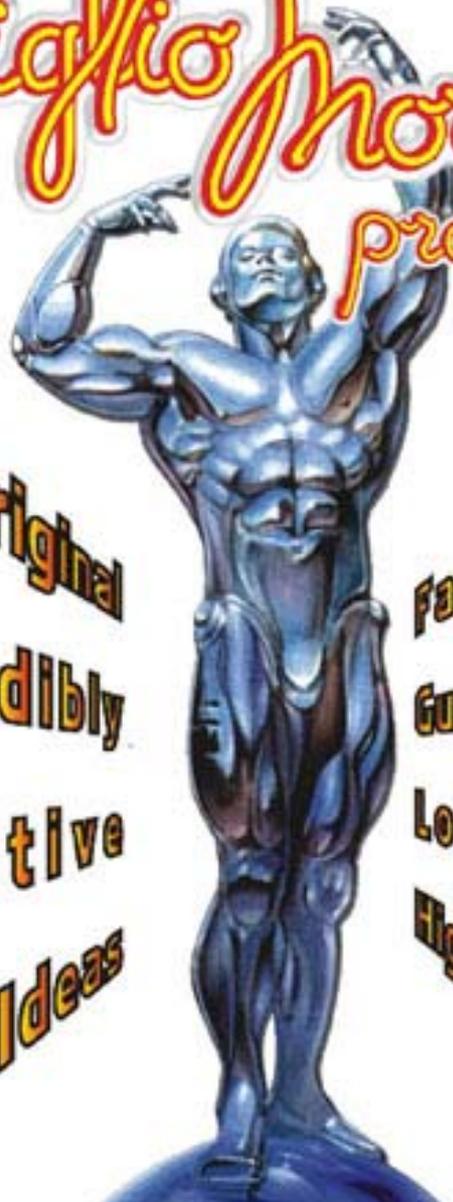

The Original
Incredibly
Creative
New Ideas

Fantastic
Guaranteed
Low cost
High quality

**PROFESSIONAL LIGHTS and SPECIAL EFFECTS
for DISCOTEQUES, ENTERTAINMENT
and SERVICE, SALE and RENT.
DESIGN and PRODUCTION of SMOKE,
BUBBLE, SNOW, FOAM and CONFETTI MACHINES
and of SPECIAL LIQUIDS too.**

**INGEGNERIA GIGLIO MORODER PRODUCTION
OFFICE and SHOWROOM**

Via Pertengo, 21 - 13033 Costanzana (VC)

☎ +39 0161 312500 - FAX +39 0161 312501

www.gigliomoroder.com - e-mail: info@gigliomoroder.com

INDEX

1. BUBBLE MACHINE

- 1.1 ROLLING STONE
- 1.2 ROLLING STONE
- 1.3 PROFESSIONALE
- 1.4 PROFESSIONALE II
- 1.5 MAXI MK2
- 1.6 MAXI MK2 RECHARGEABLE
- 1.7 MINI MAXI
- 1.8 MINI MAXI RECHARGEABLE
- 1.9 EVOLUZIONE
- 1.10 EVOLUZIONE RECHARGEABLE

2. FOAM MACHINE

- 2.1 FOAM MAGMA MK2
- 2.2 MAGMA
- 2.3 MINI MAGMA
- 2.4 MILLENIUM
- 2.5 MILLENIUM II
- 2.6 MILLENIUM 202 0/10 V
- 2.7 MINI CANNONE FUN
- 2.8 GIUBILEUM II FUN
- 2.9 SUPERBIG MK2
- 2.9 VOLCANO SPLIT

3. SNOW MACHINE

- 3.1 SNOW JET
- 3.2 NOW JET 0/10 V
- 3.3 JET SILENCE 80 dBa
- 3.4 BLIZZARD STORM
- 3.5 BLIZZARD STORM SPECIAL
- 3.6 BLIZZARD STORM SILENCE 80 dBa
- 3.7 VPR 300 TWISTER
- 3.8 SNOW JET ELECTRONIC 0/10 - DMX 512
- 3.9 SNOW JET SILENCE 60 dBa 0/10 v - DMX 512

4. SMOKE MACHINE

- 4.1 APACHE 0/10 V
- 4.2 APACHE RADIOCOMANDO
- 4.3 FUMO BASSO MANGUSTA
- 4.4 MACCHINA FUMO IP55

5. SMOKE CO₂ MACHINE

- 5.1 EFFETTO GEYSER
- 5.2 EFFETTO GEYSER 0/10
- 5.3 EFFETTO GEYSER FUMO BASSO 360°
- 5.4 EFFETTO GEYSER 8 USCITE
- 5.5 EFFETTO GEYSER DUETTO
- 5.6 EFFETTO GEYSER
- 5.7 CENTRALINA 12 CANALI 0/10 V

6. CONFETTI MACHINE

- 6.1 VRP 184 BLIZZARD
- 6.2 VRP 350 BLIZZARD
- 6.3 VRP 350 BLIZZARD LIVE

- 6.4 VRP 350 BLIZZARD LIVE SPECIAL
- 6.5 VRP 350 BLIZZARD SPECIAL HIGH POWER
- 6.6 APF 350 BLIZZARD AUTOMATIC 0/10 V
- 6.7 APF 350 MONSTER
- 6.8 RAIN PLUS

7. CONTROLLER LED RGB

- 7.1 CONTROLLER RGB 12 CH CON DMX 512 MAXI
- 7.2 CONTROLLER LED RGB DMX 512
- 7.3 CONTROLLER RGB DMX 512 MAXI
- 7.4 CONTROLLER LED RGB

8. LED STRIP

9. ACCESSORIES

- 9.1 SWITCH ON/OFF 1-4 CH
- 9.2 MACCHINA DEL VENTO
- 9.3 VENTILATORE MINI FUN
- 9.4 VENTILATORE PER AIR TUBE
- 9.5 ROTOR BOX

10. TANICHE E RACCORDI

11. TANKS AND JOIN

12. WELLS MOTOR BASE

13. BLADE

14. LIQUID FOR BUBBLE

15. LIQUID FOR FOAM

16. LIQUID FOR SMOKE

17. LIQUID FOR SNOW

18. CONFETTI

19. BATTERY

1. BUBBLE MACHINE

1.1 - ROLLING STONE



A bubble machine that continuously produces a surprising quantity of bubbles with a diameter ranging from 20 to 50 cm and is therefore a leader as far as its usage for spectacular settings is concerned. It is supported by a strong frame on the front of the machine there is a tank of transparent PVC. Inside the tank which has a capacity of 15 litres, rotates the stainless steel wheel, it has a special drawing in order to show when the liquid is finished. This machine can work continuously for longer than 2 hours. This machine, one of the best among Mr. GIGLIO's creatures, is unique in the world, as it is the only one able to continuously produce bubbles of such a size. The machine works with a special liquid called BUBBLE GIANT, sold either as a concentrated solution or a diluted solution; the liquid FLUORESCENT can also be used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. If incorrect products are used this machine might eventually fail to work. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark it is also possible to acquire the wheel in stainless steel as an accessory which has a double crown that can obtain a cloud of bubbles from 20 cm in little second ones (see image).

TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	60 Watt
Power supply cable	Included
Tanks capacity	15 lt.
Color	Black
Dimensions	22,5 x 60 x 72,5H cm
Weight (Only Macchine)	25 Kg
Weight (With Liquid)	40 Kg

1.2 - ROLLING STONE FUN



The adapter comes inserted to the graft in the body of the machine under the tank of the liquid and through the inferior hole of the stirrup of blots some. The study of this adapter of air and planned state is in order to allow the bubbles being launched up as far for means of its special bent sheet that it regulated the flow of the bubbles. The regulation of the flow is obtained by loosening two knurled nails to their sides the special bent sheet allows it to index the air flow without loss of pressure. To get the two impellers of large dimensions to its highest efficiency and low consumption an electrical worker is obtained a special application is produced in order to obtain a highest choreographic effect and of visual impact. The product has one its feeding nasals separated from the machine and its consumption of 100W to 230V 50Hz, does not produce noise. The function and bound together of the machine rolling stone comes to be only a body and of pleasant aesthetic line. The application Rolling Stone comes sold separately or the new bound together version of the machine and the new wheel. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark. It is also possible to acquire the wheel in stainless steel as an accessory which has a double crown that can obtain a cloud of bubbles from 20 cm in little second ones (see image).

TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz aon demand)
Power	100 Watt
Power supply cable	Included
Tanks capacity	15 lt.
Color	Black
Dimensions	32 x 60 x 89H cm
Weight (Only Macchine)	40 Kg
Weight (With Liquid)	55 Kg

1. BUBBLE MACHINE

1.3 - PROFESSIONALE

A Bubble machine with a difference, air flow can be varied from horizontal to vertical through the special T device located on the top of the machine. It's the first machine in the world that can work both vertically and horizontally. When it is working horizontally both the quantity and the diameter of the bubbles can be adjusted and when it is working vertically the bubbles automatically move upwards to a height of 5\7 m. NO HOT AIR IS PRODUCED. In order for the machine to function properly, special liquid called SHOW BUBBLE, is only recommended and is sold as a ready to use solution. This non- toxic liquid does not stain or cause irritation on to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power Supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	38 Watt
Power supply cable	Included
Capacità Tank capacity	800 ml.
Autonomy with 800 ml.	1 hour
Colour	Black
Dimensions	27 x 16.5 x 27H cm
Weight	2.3 Kg

1.4 - PROFESSIONALE II

This machine differs from the first model as it's known for its new chassis, its stainless steel wheel and the tank which holds 2 litres of liquid. The machine produces soap bubbles going up the plumb-line; a great amount of bubbles are produced continuously, this model has been already widely tested in many television studies, and this is what makes this product so reliable. Bubbles are calibrated in 5cm dimensions; they float without the aid of warm air further than 7 meters creating an outpour of ascending bubbles giving a great visual impact. Its low consumption of 38W to 230V 50Hz means it can be used world wide in a low cost effective manner giving great energetic consumption and quality. NO HOT AIR IS PRODUCED. The machine uses a special liquid called SHOW BUBBLE in a ready to use solution. This non- toxic liquid does not stain or cause irritation to skin and eyes, it's DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power Supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	38 Watt
Power supply cable	Included
Capacità Tank capacity	2 lt.
Autonomy with 2 lt.	1 hour
Colour	Black
Dimensions	27 x 16.5 x 27H cm
Weight	3 Kg

1. BUBBLE MACHINE

1.5 - MAXI MK2

A new model with a transparent PVC basin that has a 2 litre capacity and a stainless steel wheel. After a few seconds the machine creates a very exciting waterfall of bubbles. Bubbles disperse continuously creating a unique and unrepeatable atmosphere. The bubbles have various dimensions from 5 to 10cm in diameter. This model can work continuously for 2 hours. In order for the machine to function properly, special liquid called SHOW BUBBLE, is only recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power Supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	22 Watt
Power supply cable	Included
Capacità Tank capacity	2000 ml.
Colour	Black
Dimensions	27 x 20 x 27H cm
Weight	2.7 Kg
Weight with liquid	4.7 Kg

1.6 - MAXI MK2 RECHARGEABLE

A low voltage (12V) bubble machine that doesn't require a power supply. Thanks to its 12V lead battery with direct current DC, it is wholly autonomous and can work in any situation. It has been designed specially for amusement parks, schools, choreographies, fashion shows, weddings, special events, openings and at any time a bubble machine without electricity might be required. Thanks to its powerful, 12V battery, this machine can work continuously for longer than 3 hours it is supplied with a battery charger with a clutch set for polarity. Behind the machine, there is an ON/OFF switch, there is an electronic card with a two colour special diode informing whether the machine is working properly and on battery status. The electronic card also controls the speed of both the engine and the fan. When the battery is not charged, the machine can also be operated by connecting a plug to 230V 50Hz the battery charger supplied with the machine. It is also possible to have the machine work with the mains voltage even if the battery is not charged. For the machine to function correctly special liquid called SHOW BUBBLE, is recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED.



TECHNICAL CHARACTERISTIC	
Power Supply	12 Vcc / 4.5 AH
Power supply cable	Included
Capacità Tank capacity	2 lt.
Colour	Black
Autonomy with 2000 ml	2 Hours
Dimensione	27 x 20 x 27H cm
Weight	4 Kg
Weight with liquid	6 Kg

1. BUBBLE MACHINE

1.7 - MINI MAXI

A new model with a transparent PVC basin that has a 2 litre capacity and a stainless steel wheel. After a few seconds the machine creates a very exciting waterfall of bubbles. Bubbles disperse continuously creating a unique and unrepeatable atmosphere. The bubbles have various dimensions from 5 to 10cm in diameter. This model can work continuously for 2 hours. In order for the machine to function properly, special liquid called SHOW BUBBLE, is only recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power Supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	22 Watt
Power supply cable	Included
Tank capacity	2000 ml.
Color	Nero antigraffio
Dimensions	27 x 20 x 27H cm
Weight	2.7 Kg
Weight with liquid	4.7 Kg

1.8 - MINI MAXI RECHARGEABLE

A low voltage (12V) bubble machine that doesn't require a power supply. Thanks to its 12V lead battery with direct current DC, it is wholly autonomous and can work in any situation. It has been designed specially for amusement parks, schools, choreographies, fashion shows, weddings, special events, openings and at any time a bubble machine without electricity might be required. Thanks to its powerful, 12V battery, this machine can work continuously for longer than 3 hours it is supplied with a battery charger with a clutch set for polarity. Behind the machine, there is an ON/OFF switch, there is an electronic card with a two colour special diode informing whether the machine is working properly and on battery status. The electronic card also controls the speed of both the engine and the fan. When the battery is not charged, the machine can also be operated by connecting a plug to 230V 50Hz the battery charger supplied with the machine. It is also possible to have the machine work with the mains voltage even if the battery is not charged. For the machine to function correctly special liquid called SHOW BUBBLE, is recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED.



TECHNICAL CHARACTERISTIC	
Power Supply	12 Vcc / 4.5 AH
Power supply cable	Incluso
Tank capacity	2 lt.
Color	Black
Autonomy with 2000 ml	2 Hours
Dimensions	27 x 20 x 27H cm
Weight	4 Kg
Weight with liquid	6 Kg

1. BUBBLE MACHINE

1.9 - EVOLUZIONE

A totally new bubble machine: the air produced by the fan is directed into the eyelet of the blade, in order to avoid any kind of dispersion of fluid onto the floor. The created bubbles measure from 0.5 to 5 cm. This machine works with a special, ready to use liquid that has to be poured into the appropriate tank on the front of the machine. The capacity of the tank is about 800 cc, so the machine can continuously work for about 2 hours. In order to have the machine work properly, special liquid called SHOW BUBBLE is only recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, it's DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power Supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	22 Watt
Power supply cable	Inclucec
Tank capacity	800 ml.
Color	Black
Dimensions	27 x 20 x 27H cm
Weight	2.3 Kg
Autonomy with 800 ml,	2 hours

1.10 - EVOLUZIONE RECHARGEABLE

A totally new bubble machine: the air produced by the fan is directed into the eyelet of the blade, in order to avoid any kind of dispersion of fluid onto the floor. The created bubbles measure from 0.5 to 5 cm. This machine works with a special, ready to use liquid that has to be poured into the appropriate tank on the front of the machine. The capacity of the tank is about 800 cc, so the machine can continuously work for about 2 hours. In order to have the machine work properly, special liquid called SHOW BUBBLE is only recommended and is sold as a ready to use solution. This non-toxic liquid does not stain or cause irritation to skin and eyes, it's DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark. Low voltage (12V) bubble machine that doesn't require power supply. Thanks to its 12V lead battery with direct current DC, it is wholly autonomous and can work in any situation. It has been especially designed for amusement parks , schools, choreographies, settings for fashion shows, weddings, special events, openings and at any time a bubble machine without electricity might be required. Thanks to its powerful, 12V battery, this machine can work continuously for longer than 3 hours and it is supplied with battery charger with clutch set for polarity. Behind the machine, there is an ON/OFF switch, there is an electronic card with a two colour special diode informing whether the machine is working properly and on the battery status. The electronic card also controls the speed both of the engine and of the fan. When the battery is discharged, the machine can be operated connecting in a plug at 230V 50Hz the battery charger supplied with the machine. It is also possible to have the machine work with mains voltage even if the battery is not charged.s



TECHNICAL CHARACTERISTIC	
Power Supply	12 Vcc / 4.5 AH
Power Supply cable	Included
Tank capacity	800 ml.
Color	Black
Autonomy with 800 ml,	2 hours
Dimensions	27 x 20 x 27H cm
Weight	4 Kg

2. FOAM MACHINE

2.1- FOAM MAGMA MK2

Generating car of foam to fall. New model line P&P from the insuperable performances in strengthened version and magazine, new endorser with greater pressure, new motor, change passage flow of air and new system of fixing motor, the all moves him to an increase quantity of foam esteemed in 120 m³s to the minute. This model TOP of his/her category. In few minutes any place of great dimensions is submerged of soft and dry foam. His/her meeting place electric consumption its contained weight and the great reliability constitute a mix of incomparable quality. In endowment a pump is furnished to tall pressure with the body in steel inox, the pipeline you/he/she is furnished between car and pump and between pump and reservoir. The car has a stirrup to be suspended to an American with possibility of regulation of the inclination. In its inside the special nozzles are found atomizers that produce the foam. The consumption and of 50 liters ready mixture to use to the minute. The car can work both in horizontal that in verticale. La it plots it works with a special denominated liquid "Show FOAM" that you/he/she is sold in solution assembled by to dilute to 2% up to a maximum of 6% for very hard waters. The nontoxic liquid doesn't stain and doesn't produce irritation on the skin and the eyes, DERMATOLOGICAMENTE Testato a will. Our products are conforming to the prescriptions of the directive LVDs - EMC - RoHS (Us). recorded and patented Model.

N.B. in the next future the car will be sold with the loom in steel inox, to the alone moment to application.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1750 Watt
Power pump	1160 Watt
Foam production	120 m. cube meter wit 50 lt. foam use hallo
Color	Black / Gray
Dimension	51 x 96 x 70H cm
Weight	35 Kg

2.2 - MAGMA

A new foam model with unsurpassable performances, beyond 75 m³ to the minute with a consumption of 50 L. This model is one of the best in its category. Within a few moments any area with large dimensions will be covered with soft and dry foam. Its reduced consumption of electrical usage is contained within its weight and the great reliability constitutes a mix of unsurpassable quality. The equipment comes supplied with a pump the highest pressure is within the stainless steel body that supplies the gallery between the machine, pump and tank. The machine has one stirrup for being hung to an American structure with the possibility to regulate the inclination. Inside special nozzles are found atomizers that generate the foam. The machine can work both horizontally and vertically. . The machine works with a special called liquid SHOW FOAM that comes sold in concentrated solution, its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	750 Watt
Power pump	1160 Watt
Foam production	75 m. cube minuts
Color	Black
Dimension	51 x 97 x 70H cm
Weight	35 Kg
Weight pump	12.5 Kg

2. FOAM MACHINE

2.3- MINI MAGMA


New machine foam model the unsurpassable performances, with technology inveter from consumption the reduced. With single 2 Kw of current in order to obtain 20 \ 25 m foam cubes to the minute. In its inside the special nozzles are found atomizers that generate the foam, connected to a pump in stainless steel to high pressure allows to this machine from the compact dimensions and from the contained weight to work in whichever space it is small that large without problems is in horizontal that in vertical. Incredible the vision of the foam that gushes out from its filter like an enormous frosted cone that to second of the obtainable regulation for means of the remote control to thread in low tension connected to the apparatus inveter mail inside of the cylinder allows to regulate the speed of spin of the special impeller that composes the body machine, obtains therefore one greater or smaller foam amount produced from the machine. And possible also to regulate the consumption by means of the regulator of flow to equipment of the machine for a smaller consumption of liquid. The machine can work in both horizontal and in vertical. The machine works with a special liquid called SHOW FOAM sold in concentrated solution to dilute to 2% until a maximum of 6% for hard waters a lot. The non toxic liquid does not stain and does not cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. The machine comes sold completes of foam generator with annexed fan, pump to high pressure in stainless steel and inveter of pilotage between feeding in current monophase and motor with remote control to thread and regulation speed, complete feed pipe of connections in plastic to high pressure between pump and machine and tube between pump and tank not supplied. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	800 Watt
Power pump	850 Watt
Foam production	20/25 m. cube minute
Color	Black
Dimension	30 x 61 x 50H cm
Weight	22 Kg
Weight pump	11 Kg

2.4 - MILLENIUM

Machine foam with compact dimensions and easy use. Suitable for premises which hold public shows entertainment and services. An elegant and refined design, a motor with a new concept equips the machine with 2HP power. The machine is equipped with a radio frequency filter the feeding connector is equipped with 2 fuses online and one inner pump for the operation of the machine. The production of foam is beyond 1 m³ to the minute with a litre of mixture. The machine works with a special called liquid SHOW FOAM which is sold in a concentrated solution its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.

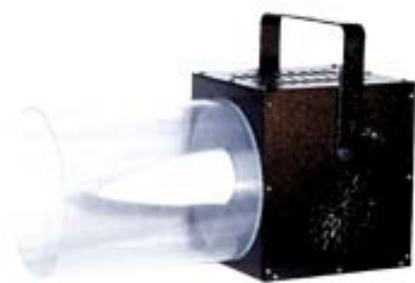

TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Power supply cable	Include
Foam production	1 m. cube minuts
Color	Black
Dimension	55 x 25 x 39H cm
Weight	11 Kg

2. FOAM MACHINE

2.5- MILLENIUM II

Machine foam with compact dimensions and easy use. Suitable for premises which hold public shows entertainment and services. An elegant and refined design, a motor with a new concept equips the machine with 2HP power. The machine is equipped with a radio frequency filter the feeding connector is equipped with 2 fuses online and one inner pump for the operation of the machine. The production of foam is beyond 1 m³ to the minute with a litre of mixture. The machine works with a special called liquid SHOW FOAM which is sold in a concentrated solution its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Power supply cable	Included
Foam production	1.5 m. cube minuts
Color	Black
Dimension	55 x 25 x 39H cm
Weight	11 Kg

2.6 - MILLENIUM 202 0/10 V

A high performances foam machine, with a newly designed "tromboncino" 2HP motor with double insulation and three stages, counter rotating turbines. It is provided with a radio frequency filter, specially built according to our specifications and located inside the net connector, which is equipped with 2 on line fuses. The low voltage 0\10V electronic card of the machine controls the various functions of the engine, as well as its switching ON\OFF. The remote controls wire is 5 metres long with jack stereo 6.3.signal connector. Both the new submersed pump with PVC shell and all the pneumatic fittings required for the proper functioning of the machine are supplied with the machine itself. It is the leader model in the field of portable foam machines because of the huge quantity of foam flowing from the cylinder of Plexiglas on the front of the machine that is 2 m³ per minute. The machine works with a special called liquid SHOW FOAM that comes sold in concentrated solution, its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED.

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Power supply cable	Included
Remote control	5 mt Cable
Foam production	2 m. cube minuts
Color	Black
Dimensions	55 x 29 x 39H cm
Weight	11 Kg
Weight with pump	4.5 Kg

2. FOAM MACHINE

2.7 - MINI CANNONE FUN

A foam machine from the design of MINIUMS GUN FUN. Equipped with 4 special motors purposely constructed in order to obtain the maximum pressure and a fan from 1HP inserted in the space motor with impellers to give the highest pressure in order launch the ribbon foam beyond 8 meters. The special motors were purposely constructed in order to obtain the maximum pressure with equal power to 2HP, the consumption and par to 1300W to 230V 50Hz. The equipped motor and three version stage upsets some against rotary in double isolation, all the power distributed from the motor is used beyond 110%. The motors are fed from the a filter of radio frequency a new construction to give the highest discouragement of emission of radio frequency, every motor is fed from its filter mounted in the stirrup of implantation to the body machine. The machine comes supplied with one pump for immersion with an external shell in plastic and motor material in stainless steel. The pump feeds the 4 motors correctly and supplies the gallery and the connections to the necessary graft for the machine to operate come giving the equipment a regulator of flow for regulation of the foam amount. The maximum distribution for this varied model for water and its dilution varies from the 6/8m3 to the minute. The machine comes fed from two tension feedings 230V 50Hz, one the advanced motors and second the inferior motors and the impeller, ignition is through two switches inserted in the posterior panel of the machine from 16 Amp. The machine works with a special called liquid SHOW FOAM that comes sold in concentrated solution, its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED. The machine is sold with its plan of support and is possible to carry out the regulation of the launch angle, and position of rest the machine thanks to the special realized stirrup which allow it to be transported in a vertical position for minor blocks to occur in the transportation and to occupy little space, in the base there are 4 fortified brake wheels, in the advanced top of the body of the machine an emergency hook can be allocated with a M12 hinge screwed to the body of the machine, which also allows the machine to be hung to one structure American. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	6000 Watt
Power pump	450 Watt
Power supply cable	Included
Foam production	6/8 m. cube minuts
Color	Grey
Dimensions	110 x 75 x 115H cm
Weight	70 Kg

2.8 - GIUBILEUM II FUN

A top line foam machine, undisputedly the queen of showbiz, is manufactured with customized design and can be painted on demand with airbrushed drawings; the new version resembles a BIG BOTTLE. Inside there are engines specially built for this machine, whose technical specifications are the same for all our foam machines models. The 2HP, three stage engines with double insulation and counter rotating turbines, have their own radio frequency filter. The launching system, with a 1HP fan located inside the machine, has been specially designed for this machine and can therefore throw the foam 10 metres. It is supplied with a submersed pump at 230V 50Hz together with pneumatic fittings and a flow regulator. Before assembling the machine a customer can request either voltage 230V 50Hz or 380V 50Hz with five pin plug. The machine works with a special called liquid SHOW FOAM that comes sold in concentrated solution, its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. The quantity of foam produced by this model depends on the quality of the prepared mix: it can therefore range from a minimum 5 m3 per minute up to 10 m3 per minute, simply because water with a non aggressive or hard pH is being used. Inside the body there is an eyebolt to hang the machine to an American structure and lift it. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz (230 Vac / 50 Hz on demand)
Power	7000 Watt
Production	10 / 15 mt. Cube per minuts
Power pump	450 Watt @ 230 Vac / 50 Hz
Color	Grey
Dimension	80 x 210 x 86H cm
Weight	100 Kg

2. FOAM MACHINE

2.9- SUPERBIG FOAM MK2

A top line foam machine, undisputedly the queen of showbiz, is manufactured with customized design and can be painted on demand with airbrushed drawings; the new version resembles a PHOTOGRAPHIC LENS. Inside there are engines specially built for this machine, whose technical specifications are the same as all our foam models the 2HP, three stage engines with double insulation and counter rotating turbines, have their own radio-frequency filter. It is supplied with its submersed pump at 230V 50Hz together with pneumatic fittings and a flow regulator. Before assembling the machine voltage 380V 50Hz or 230V 50Hz can be required with a five pin plug. On demand 120V 60Hz. The machine works with a special called liquid SHOW FOAM that comes sold in concentrated solution, its dilution can vary from a percentage of 2% to a liquid maximum of 6% depending on the hardness of water being used. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED. The quantity of foam produced by this model depends on the quality of the prepared mix: it can therefore range from a minimum 10 m3 per minute up to 12 m3 per minute, simply because water with a not aggressive or hard pH is being used. Inside the body there is an eyebolt to hang the machine to an American structure and lift it. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz (230 Vac / 50 Hz on demand)
Power	8000 Watt
Power pump	450 Watt
Foam production	10/12 m. cube minuts
Color	Grey
Dimension	80 x 85 x 95H cm
Weight	80 Kg

2.10 - VOLCANO SPLIT



Unique in its genre, the most powerful in **THE WORLD**, dual function is to launch that fall, managed by technology inveter double turbine and feed pump 316 stainless steel high pressure. Impressive its range of over 20 metres in the fastest emission and volume with an unparalleled power. Products designed for large events and Mega Foam Party. The machine is sold in basic version without stand with bracket fixing on suspension for American structures.

Possibility of generating foam to fall with adjustable distance of launching the big cylinder foam generated by the turbine smallest positioned in the center of the machine, while the machine generates the foam can turn on the second turbine biggest push to launch the giant flakes foam to over 20 metres and with the possibility of adjusting the distance pleasure for half of technology inveter provided.

The operator may at any time decide to change ways of working without interrupting the show or event. The incredible performance of 1:2,5 or with a litre of foam you get 2.5 cubic meters of soft foam.

Product built at the request of accessories reviews running treated in the smallest details, following requests. **This product is built on reservation and with delivery times of more than 120 days.** Product complies with the existing directives LVD EMC RoHS EC



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz (230 Vac / 50 Hz on demand)
Power	5000 Watt
Power pump	1650 Watt
Foam production	70/100 mt. Cube minut
Color	Black
Dimension	160 x 105 x 250H cm
Weight	170 Kg

3. SNOW MACHINE

3.1 - SNOW JET

A Snow machine with flake regulation. Thanks to a "tromboncino" 2HP engine with three stage, double insulation its power can be wholly exploited. The proper operation of this machine is further granted by a steady depression, that's why this machine doesn't require any suction pump for the liquid. The result is a highly professional product with excellent performance and low cost maintenance. The machine works with a special called liquid SHOW SNOW that comes sold in a ready to use solution or concentrated with dilution of 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED. The tank is located on the rear of the body and has a capacity of over 5 litres. Inside the tank, which is provided with a cap and under cap with a total width of 130 mm to make it easier to fill up with the machine with liquid, there are pneumatic valves for pressure delivery and return. With 5 litres of ready to use liquid and the flake regulator wholly open, this machine can work for 22 minutes, non stop. It is provided with the new voltage inlet connector, specially designed for our products. It has two on line, 6.3 Amp. T fuses together with its anti frequency filter, especially designed by Mr. GIGLIO. SNOW JET, a real compact and light machine, can throw the flake as far as 8 metres, thanks to its powerful engine. It can be used with a ROTOR BOX in order to get a snowfall with an 8 metre diameter. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Cable power supply	Included
Autonomy	22 minut at max power
Tank capacity	5 lt.
Color	Nero antigraffio
Dimension	51 x 23.5 x 32H cm
Weight	9 Kg

3.2 - SNOW JET 0/10 V

We are really proud to be able to present you the first noiseless snow machine in the world, especially designed for theatres, TV studios, sets and so on. Everybody could build it but nobody has ever had the heart to show it, letting it become the star of INGEGNERIA GIGLIO MORODER PRODUCTION. Since it is a highly professional machine, it is sold together with its acoustic certification. The noise ranges between 55/60 dBa measured at a distance of 5 metre. Inside this machine, formed by different parts deeply joint together, there is a special silencer, especially built to eliminate both the noise from the engine and the howling created by the air moved by the turbine working as a pump. The turbine is formed by a 2HP, three stage, engine with double insulation and counter rotating turbines and it is directly controlled by an electronic card with DMX 512 signal and a low voltage 0\10V. That's how it can produce a totally noiseless snowfall. The machine is supplied with a low voltage 0\10V remote control, a 5 metre long wire plus slider to control its ON/OFF switching and electronic flake control with industrial patent for invention. The tank is located on the rear on the body and has a capacity of 11 litres which means a non stop, 1 hour operation. Inside the tank, provided with cap and under cap with a total width of 130 mm in order to make the filling up of liquid easier, there are pneumatic valves for pressure delivery and return. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or concentrated to be diluted at 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. In order to create this amazing, fantastic machine a team of professionals have been working for the past 5 years making theoretical and practical calculations of acoustic and acoustic engineering, mechanics and aero hydraulics. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Cable power supply	Included
Autonomy	22 minuts
Remote control	5 mt cable
Tank capacitu	5 lt.
Color	Black
Dimension	51 x 23.5 x 32H cm
Weight	9 Kg

3. SNOW MACHINE

3.3 - JET SILENCE 80 dBa

A professional Snow machine with a real choreographic effect. Has a Silent atmosphere where the maximum quietness is demanded. The noise generated from the machine is of 80 dBa to 1 meter. It launches the ribbon beyond 8 meters. In coupling to ROTOR BOX in order to obtain one snow of the diam. of 8 m. The machine works with a special called liquid SHOW SNOW that comes sold in a ready to use solution or concentrated with dilution to 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED. There is also a Regulator where a snowflake can be changed from large to small. A Tank which holds 5 liters of liquid has a consumption of 150\200 cc. to the minute. New motor from 2HP of power in double insulation. The model also has a filter of radio frequency with double fuse and an ON\OFF switch. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	1300 Watt
Cable power supply	Included
Autonomy	22 minuts
Tank capacity	5 lt.
Color	Black
Dimension	45 x 60 x 54H cm
Weight	25 Kg

3.4 - BLIZZARD STORM

A Snow machine with a difference it looks like a huge hair dryer, provided with a 3HP engine at 230V 50Hz, and an iron rotor with misaligned blades in order to shoot the snowflakes at least 18 metres away. Thanks to a special adapter, this machine can throw confetti with a diameter of 5 cm, as well. It is supplied with an immersion pump, a regulator and a tube. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or concentrated to be diluted at 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. It is one of the best sellers our firm and we have been working hard to develop a new, more user friendly version.

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	2200 Watt
Power pump	350 Watt
Color	Black / Blu3
Dimension	54 x 60 x 80H cm
Weight	55 Kg

3. SNOW MACHINE

3.5 - BLIZZARD STORM SPECIAL

Snow machine which looks like a huge hair dryer, provided with a 4HP engine at 380V 50Hz, and iron rotor with misaligned blades in order to throw the snowflakes up to 20 metres away. Thanks to a special adapter, this machine can throw confetti with the diameter of 5 cm, as well. It is supplied with a immersion pump with a regulator and a tube. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or to be diluted at 5%. The non toxic liquid does not stain and does not cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. It is one of the best sold products of our firm and we have been working hard to develop a new, more user friendly version. Acquiring accessory "KIT VENTURI TUBE" the machine can launch also the confetti (see detailed lists technical "CORIANDOLI APF 350 BLIZZARD").

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark.



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz
Power	3000 Watt
Power pump	350 Watt
Color	Black / Blue
Dimension	54 x 60 x 80H cm
Weight	60 Kg
Weight pump	4.5 Kg

3.6 - BLIZZARD STORM SILENCE 80 dBA

Novità Mondiale per tutti gli operatori Professionali del settore la 1° macchina generatrice di neve con tecnologia inverter. Un prodotto di altissimo pregio e qualità, un nuovo traguardo che consolida la gamma dei ns prodotti. Ideata per gli studi Televisivi Cinematografici e Teatri e in ogni luogo dove sia necessario il massimo silenzio. La macchina e' alloggiata in una struttura di legno e acciaio con le pareti di materiale fonoimpedente/assorbente per ottenere il massimo abbattimento del rumore. Dotata di 4 ruote pivotanti con freno per manovrare la macchina con sicurezza. La turbina ad altissima pressione viene equipaggiata con un motore da 2.2 KW di base a richiesta con motore speciale da 3 KW a 380V 50Hz. Uno speciale silenziatore abbatta ulteriormente il rumore generato dal dall'aria e sospinge il fiocco di neve fino a oltre 20 metri. L'inverter si trova all'interno della macchina, e un telecomando esterno regola la velocità di rotazione e ON/OFF. E possibile a piacere regolare la distanza di lancio del fiocco di neve e la quantità per mezzo del regolatore di flusso. E possibile regolare l'angolo di lancio di +30°. Viene fornita in dotazione la pompa ad immersione esterna completa di tubazione e il regolatore di flusso. In fase di realizzazione del prodotto sono possibili variazioni delle misure e realizzazione di modifiche tecniche a specifiche del cliente. La macchina funziona con uno speciale liquido denominato "SHOW SNOW" che viene venduto sia in soluzione pronta all'uso che in soluzione concentrata con diluizione al 5%. Il liquido atossico non macchia e non produce irritazione sulla pelle e gli occhi, DERMATOLOGICAMENTE TESTATO. I nostri prodotti sono conformi alle prescrizioni delle direttive LVD - EMC - RoHS (CE). Modello registrato e brevettato



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz
Power	2200 Watt
Power pump	350 Watt
Color	Nero semilucido naturale
Dimension	80 x 150 x 95H cm
Weight	100 Kg
Weight pump	4.5 Kg

3. SNOW MACHINE

3.7 - VPR 300 TWISTER

A Snow machine to launch snow more than 25 metres away. Undisputedly the leader of its category since it can simulate an extremely powerful snowstorm, when this machine is working; it looks like a great, exciting snowstorm. This machine is provided with a 5.5HP, 380V 50Hz engine with blades rotating forwards. Thanks to such a combination the flakes can be launched to more than 25 metres away. It is supplied with a submersed, external pump at 230V 50Hz together with pneumatic fittings and a flake regulator. It's the best product in a standard production wholly carried out with first rate materials, and has been worked out after long theoretical and practical calculation of aero hydraulics and a 2 year period of tests. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or concentrated to be diluted at 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED.

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz
Power	4000 Watt
Power pump	300 Watt
Color	Black opaque
Dimension	77 x 53 x 85H cm
Weight	55 Kg
Weight pump	4.5 Kg

3.8 - SNOW JET ELECTRONIC 0/10 V - DMX 512

This snow machine, with its totally new, aggressive, impressive design has had its body carved out by a laser, it is nowadays the best that can be offered by mechanics and electronics applied to snow machines. The 2HP engine has been specially designed to get the maximum thrust pressure; thanks to its winding in double insulation and counter rotating, three-stage turbines, it keeps a steady and lasting pressure; the flakes are therefore launched as far as 10 meters. This machine has a new electronic system to automatically regulate the flake the result of an industrial patent invented through the control of an electronic card with DMX 512 and 0\10V. Inside the net connector there's a radio frequency filter which has been specially built for this machine, with on line protection provided by two 6.3 Amp. T fuses. Inside the body of the machine there is an 11 litre tank with a 130 mm opening to make it easier to fill the machine with liquid. Thanks to the high capacity of its tank there are pneumatic valves for pressure delivery and return. This machine can continuously work for 1 hour with the flake regulation set to an average big flake. The electronic card, which controls the various functions of the engine, has a remote control with a wire 5 meters long, a slider to switch the machine ON\OFF and to electronically regulate the flake. The electronic card with DMX 512 signal can be operated with whatever gear case has DMX 512 signal after having previously checked the polarity of the input\output signal. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or be diluted at 5%. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICAL TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - Rosh - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	1300 Watt
Power supply cable	Included
Color	Black
Dimension	45 x 25 x 59H cm
Weight	16 Kg

3. SNOW MACHINE

3.9 - SNOW JET SILENCE 60 dBa 0/10 v - DMX 512

We are really proud to be able to present you the first noiseless snow machine in the world, especially designed for theatres, TV studios, sets and so on. Everybody could build it but nobody has ever had the heart to show it, letting it become the star of INGEGNERIA GIGLIO MORODER PRODUCTION. Since it is a highly professional machine, it is sold together with its acoustic certification. The noise ranges between 55/60 dBa measured at a distance of 5 metre.

Inside this machine, formed by different parts deeply joint together, there is a special silencer, especially built to eliminate both the noise from the engine and the howling created by the air moved by the turbine working as a pump. The turbine is formed by a 2HP, three stage, engine with double insulation and counter rotating turbines and it is directly controlled by an electronic card with dmx 512 signal and low voltage 0\10V. That's how it can produce a totally noiseless snowfall. The machine is supplied with low voltage 0\10V remote control, 5 metre long wire plus slider to control its switching ON/OFF and electronic flake control with industrial patent for invention. The tank is located on the rear on the body and has a capacity of 11 litres which means a non stop, 1 hour operation. Inside the tank, provided with cap and under cap with a total width of 130 mm in order to make the filling up of liquid easier, there are pneumatic valves for pressure delivery and return. This machine works with a special liquid called SHOW SNOW that can be sold either ready to use or to be diluted at 5%. The non toxic liquid does not stain and does not cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. A team of professionals has been working for 5 years making theoretical and practical calculations of acoustic and acoustic engineering, mechanics, aero hydraulics in order to be able to create this fantastic machine. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	1300 Watt
Power supply cable	Included
Tank capacity	11 lt.
Remote control	5 mt with slider.
Color	Black
Dimension	135 x 52 x 56H cm
Weight	70 Kg

4. SMOKE MACHINE

4.1 - APACHE 0/10 V

An average power smoke machine, differing from the others for its customized burner, the high pressure pump at 16 bars and its low consumption of liquid. This machine is equipped with a safety thermostat with manual resetting and is controlled by a low voltage 0\10V card, for its remote switching ON\OFF as well as to control the ready status through the LED. The remote control wire is 5 metres long with jack stereo 6.3 signal connector. The tank with a big opening has a capacity of 2 litres. For the proper functioning of the machine and the persistence of smoke, the special smoke liquid called SHOW SMOKE is recommended. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark




TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	1500 Watt
Power supply cable	Inclucec
Remote control cable	5 mt
Color	Black
Dimensions	25 x 30 x 35H cm
Weight	9 Kg

4.2 - APACHE RADIOCOMANDO

This model has the same technical characteristics as the 0/10V model with the addition of the radio control. An average power smoke machine, differing from the others for its customized burner, the high pressure pump at 16 bars and its low consumption of liquid. This machine is equipped with safety thermostat with a manual resetting and it is controlled by a low voltage 0\10V card, for its remote switching ON\OFF as well as to control the ready status through the LED. The remote control wire is 5 metres long with jack stereo 6.3 signal connector. The tank with a big opening has a capacity of 2 litres. For the proper functioning of the machine and the persistence of the smoke, it is recommended to use the special smoke liquid called SHOW SMOKE. This non- toxic liquid does not stain or cause irritation to skin and eyes, DERMATOLOGICALLY TESTED. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations.

Patented model and registered trademark

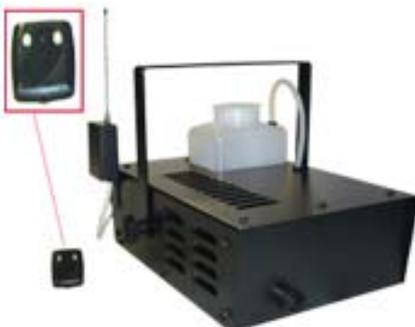

TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	1500 Watt
Power supply cable	Included
Color	Nero antigraffio
Radiocontroller	Included
Dimension	25 x 30 x 35H cm
Weiht	9.5 Kg

4. SMOKE MACHINE

4.3 - FUMO BASSO MANGUSTA



Generating car of low smoke with plant inside refrigerator, the car in combining to a car smoke with varying power to required by 1500w to 2500w, managed by card with microprocessor with signal dmx512 512ch.

- . regulation of the temperature with possibility of settare to pleasure within the ranges reimpostati of factory the maximum temperature,
- . regulation of the pump of feeding in Duty Cycle,
- . possibility of control panel operation without any connection to centralina or signal 0\10v.
- . operation with remote control in low tension to thread 0/10v
- . Display lcd 16 characters on two lines, blue illumination with white writings.
- . Powerful group refrigerator with Gas ecological R404 Á totally.

The car produces smoke flood lower part power for over 1 minute, to according to of the regulation required by the operator can work in continuous for over 10 minutes.

The smoke escapes from a flexible pipe in endowment pushed by a fan it posts on the superior panel of the car and the effect scenografico and of tall impact.

Car for professional use for studies of Television and Theaters.

Built to sectors in steel plate with thickness increased to sectors connected, and possible to disconnect the panel connected to the group scaldante and the same one for possible inspections.



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (380 Vac / 50 HZ on demand)
Power	1500 Watt
Output pipe	2 mt (On request lenght various)
Coverage	> 50 mq minuts
Head power	1500 W (on demand 2500 Watt)
Compressor power	1500 / 2000 Watt
Dimensions	107 x 88 x 55H cm
Weight	140 Kg

4.4 - MACCHINA FUMO IP 55

Car Professional Line P&P 1° to the World generating of smoke from the innovative design and in class Ip 55, the car has been studied for use in environments to the open one where the product and left to the water and it doesn't need protection. Electronics managed by microprocessor and management of the functions, connections in DMX 512 2 ches or in 0/10v, remote control to thread furnished in endowment (only version 0/10 Vs). Display to 7 red segments, management through pulsating formulation channel, signaling wrong polarity. Invertitore of polarity. Innovative system of regulation and control temperature through special probe. I check lack of liquid in the tank with probe of automatic management and interruption of the feeding to the car. (to application) External tank from 5 liters. Loom with angular profile radiated in patented aluminum with inside takings of air and plate in steel, is not present openings in the plates. Pomp to tall pressure managed by the microprocessor. Resistance from 1500 Watts. Management street DMX quantity liquid and consumption. Long issue smoke to the maximum power around 90 continuous seconds, or through regulation speed pumps times of issue up to 7 minutes. Innovative system of support to floor, to application classical stirrup. Product conforming to the prescriptions of the directive LVDs-EMC-RoHS-Us. Recorded and patented model.



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 HZ on demanf)
Power	1500 Watt
Power supply cable	Included
Color	Black opaque at dust
Remote controller	5 mt cable
Dimensions	46 x 22.5 x 24H cm
Weight	10.5 Kg

5. SMOKE CO₂ MACHINE

5.1 - EFFETTO GEYSER

This new product designed for applications LIVE, Entertainment, Television and Movie Productions, in simple and great visual impact. The product works with a simple command ON \OFF and an accompanying tube 5 metres in length. The tube is connected to the machine and the other side connecting the cylinder CO₂. The product generates a jet of steam reaches the 8 \10 metres in height. We recommend using the product always united 'in batteries 2 - 4 - 8 - 12 units' with different switches or pleasure simultaneously. Ability to request model GEYSER 0 \10V with electronic board in low voltage 0 \ 10V and remote flush 5 meters long with 6.3 stereo jack connector and command button ON\OFF. A microprocessor control unit for managing up to 12 units' and programmable by the complete range of this product easy to use and great impact. The product and built with sheet steel and epoxy powder coat. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	27 Watt
Power supply cable	Included
Remote controller	5 mt.
Color	Black
Dimensions	20 x 28 x 28H cm
Weight	2.5 Kg

5.2 - EFFETTO GEYSER 0/10 V

This new product designed for applications LIVE, Entertainment, Television and Movie Productions, in simple and great visual impact. The product works with a simple command ON \OFF and an accompanying tube 5 metres in length. The tube is connected to the machine and the other side connecting the cylinder CO₂. The product generates a jet of steam reaches the 8 \10 metres in height. We recommend using the product always united 'in batteries 2 - 4 - 8 - 12 units' with different switches or pleasure simultaneously. Ability to request model GEYSER 0 \10V with electronic board in low voltage 0 \ 10V and remote flush 5 meters long with 6.3 stereo jack connector and command button ON\OFF. A microprocessor control unit for managing up to 12 units' and programmable by the complete range of this product easy to use and great impact. The product and built with sheet steel and epoxy powder coat. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	27 Watt
Power supply cable	Fornito
Remote controller	5 mt.
Color	Black
Dimensions	20 x 28 x 28H cm
Weight	2.5 Kg

5. SMOKE CO₂ MACHINE

5.3 - EFFETTO GEYSER FUMO BASSO 360°

This new product designed for applications LIVE, Entertainment, Television and Movie Productions or, in simple and great visual impact. The product works with a simple command ON\OFF and an accompanying tube 5 metres in length. The tube is connecting to the machine through a graft junction quickly and on the other connecting the cylinder CO₂. In a few seconds you generate a smoke down to a diameter of over 10 meters and a height varies according to the correct position of the product, there is no machine generating smoke of any type that can compete with this product as emission quantities a pleasure of smoking and quickly fade in and without a wet alone or in any type of floor, with a low power consumption of only 27 W. The smoke is generated by a special nozzle atomiser steel AISI 316 specially constructed to obtain the best passage of CO₂ and get better gas expansion. The product and built with steel discs coupled to each other and coated with epoxy powder handle transport and positioning stylized. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 HZ on demand)
Power	27 Watt
Power supply cable	Included
Remote controller	5 mt.
Color	Black
Dimensions	23 x 20 x 20H cm
Weight	11.5 Kg

5.4 - EFFETTO GEYSER 8 USCITE

Innovative and only product in its kind devised for all the Professional uses of the Show. Enormous scenic impact and exaggerated volumetric dimension of cold smoke. Ideal for the premises where an effect of optical involvement is wanted to be created, scenografico and great visual impact. Effect center track with 8 escapes with possibility of exited operation ON\OFF single or two or four or all together. Constructed with tubes in Inox steel 316 it certifies to you from 1" and metallic connections Asa 3000 knits on tig. Geometric constructive shape to OCTAGON. Remarkable impact for this center track fruit of one constant research and development, the escapes can regulated in graduates to appeal to in order to obtain to various second of the scene optical effects. The product and composed from 2 parts that join one to the other for a transport and installation more easy. It comes supplied to equipment a feed pipe between bottle CO₂ and product of length 10 meters. Possibility to demand same model GEYSER 8 ESCAPES 0\10V with card electronic in low tension 0\10V and remote control to long thread 5metri with connector jack 6,3 stereo and push-button of commando ON\OFF; one telephone exchange to microprocess for the management until 12 units and by operator programmabile completes the range of this simple product use and great impact. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (12/24/120 Vac / 60 HZ on demand)
Power	216 Watt
Power supply cable	Included
Remote controller	5 mt.
Color	Gray / Black
Dimensions	Diam. 187/140 x 27H cm
Weight	58 Kg

5. SMOKE CO₂ MACHINE

5.5 - EFFETTO GEYSER DUETTO

Realized for Live applications, Shows and Television or Cinematographic Productions, simple innovative product in use and of great visual impact. The product works with a simple command ON\OFF and a length equipment tube 5 meters. The tube comes connected to the machine and the bottle of Co₂. The machine generates a vapor jet that catches up 12\15 meters height. The product has two escapes commant simultaneously from one only special elettrovalve purposely constructed with technical detailed lists and innovative solution of the pilotage fulcrum expansion of the gas Co₂. Is possible modify the inclination of the torpedo tubes from 0 to 250° on axis of escape nearly. Possibility to demand same model GEYSER 0\10V with card electronic in low tension 0\10V and remote control to long thread 5 meters with connector jack 6,3 stereo and push-button of commando ON\OFF, one telephone exchange to microproces for the management until 12 units and the operator programmabile completes the range of this simple product in use and great impact. The product and constructed with sheet steel and painted to epoxy powders. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (12/24/120 Vac / 60 HZ on demand)
Power	27 Watt
Power supply cable	Included
Remote controller	5 mt.
Color	Black
Dimensions	20 x 28 x 26H cm
Weight	4 Kg

5.6 - EFFETTO GEYSER ICE TRONIC

Machine generating smoke cold CO₂ effect GEYSER, a powerful engine from 5.5 HP to 380 V pushes the steam generated by its sprayers to over 25 metres. Product designed to Disco Live and where they should strike with a surprising effect the viewer. A powerful cold cone of steam in a few moments covers an entire local surprising for its speed and visual spectacular. The machine consists of a fan with turbine blades forward to a very high pressure and scope of a special tube launchers designed for maximum yield and great visual and choreographic in its internal components are placed under high pressure and valves used for the proper functioning, special sprayers ranked series for a performance and product durability. Product complies with the existing directives LVD EMC RoHS EC



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz
Power	4000 Watt
Power supply cable	Included
Color	Black
Dimensions	54 x 110 x 150H cm
Weight	76 Kg

5. SMOKE CO₂ MACHINE

5.7 - CENTRALINA 12 CANALI 0/10 V

Power management for up to 12 channels of product Geysler. Electronics managed by microprocessor programming with the possibility of working time break from one channel to another and jump channel also can program and the number of cycles. The programming unit is maintained in a solid state memory to that retains data when power is removed to the unit STORED DATA ARE NOT LOST. Earnings per Live performances and application where you want to manage with a timed logic functionality of the product. Display 4 to 7 segments, 2 green, and 2 red buttons programming functions, the possibility of requiring custom program at will. Every channel can be programmed with a time from 0 to 99 sec. The cross from one to another channel can be programmed from 0 to 99 sec. Each channel can handle parallel effects other 30 for a total of 360 units. The apparatus must be connected to our card in low voltage 0 \10V, and connecting wire with 6.3 stereo jack. Our meet the requirements of the LVD EMC directives RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz
Protection on fuse	500 ma / 250 V
Power supply cable	Included
Color	Black
Dimensions	26 x 19 x 9H cm
Weight	1.5 Kg

6. CONFETTI MACHINE

6.1 - VRP 184 BLIZZARD

A Professional machine to throw either round confetti with a diameter of 5 cm or strips of 1.5 x 5 cm. With its 1HP, noiseless engine it suits all public places where shows are held, or where its silence and user friendliness are required. This machine is formed by 3 parts, mechanically joined by each other: the base on which the engine is positioned, the engine itself and the Venturi tube for throwing. The confetti can be launched at least 8 metres in distance while the shooting inclination can be set from 0 to 90°. This machine has been specially designed for all shows and events that might require confetti as part of choreography or a scenic effect with great visual impact. This machine has been built to work non stop and doesn't need any maintenance at all. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	750 Watt
Power supply cable	Included
Use	Non stop
Color	Black
Dimensions	60 x 55 x 45H cm
Weight	22 Kg

6.2 - VRP 350 BLIZZARD

A Professional machine to throw either round confetti with a diameter of 5 cm or strips of 1.5 x 5 cm up to 15 meters, thanks to the power of its 3HP engine with blades rotating forwards in a frame of aluminium that looks like a huge hair dryer. This machine is formed by 3 parts: first the base on which the engine is positioned, second the engine itself and third the Venturi tube joined to the engine by a mechanical ring nut to enable a shooting inclination from 0 to 45°. Thanks to the special engine, the special design based on theoretical and practical calculation of aero hydraulics, this machine can continuously throw up to 3 Kg. of confetti per minute to more than 15 metres away. This machine doesn't need any maintenance at all.

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (380 Vac / 50 Hz on demand)
Power	2200 Watt
Power supply cable	Include
Use	Non stop
Color	Black
Dimensions	55 x 75 x 90H cm
Weight	53 Kg

6. CONFETTI MACHINE

6.3 - VRP 350 BLIZZARD LIVE

This machine was designed for all the demands that require a machine to be able to shoot out a large emissions of confetti, the machine comes bound together to a new motor with 3HP that takes advantage of to 120% which it allows through the sucker supplied in equipment launch until 20 meters 50 Kg. approximately of confetti to the minute. The machine comes lodged on a fortified base of 4 wheels with a brake and it is also a possibility to vary the angle launch of +30°-30°, its ejector which is shaped as a conical gun offers a highest visual impact to the machine. The machine can be uniform in three fields for transport, first a torpedo tube that comes fixed on the mouth of the fan for means of 4 M8 bolts, second the turbine that comes lodged on the fixed base and has means of 4 M12 bolts and third the base or plan of support. While being operated it is possible to vary the launch angle to approximately 45° for means of two knurls you mail on the external crown of the motor that of it qualify its regulation. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	2200 Watt
Power supply cable	Included
Use	Non stop
Color	Black / Blue
Dimensions	162 x 55 x 85H cm
Weight	55 Kg

6.4 - VRP 350 BLIZZARD LIVE SPECIAL

Machine for I use Professional. One special turbine to most high pressure and a new motor from 3HP allows launch to beyond 20 meters 50Kg. of confetti to the minute to continuous use. One great cloud of confetti in to cover one immense area. Devised for the fields sportswomen and manifestations in the open air or meeting today it is placed to you concern to us of the category for its simple and effective realization. The machine and on one fortified base of 4 wheels 2 with brake. An demand a special base of possibility to vary the angle launch of +30°-30°.New ejector to shape of conical gun offers a great visual impact. The machine can be uniform in three parts for the transport. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark. The machine comes sold in offer with the **SNOW KIT** is order one product for two different effects



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (380 Vac / 50 Hz on demand)
Power	2200 Watt
Power supply cable	Inclucec
Use	Non stop
Color	Black
Dimensions	54 x 170 x 150H cm
Weight	54 Kg

6. CONFETTI MACHINE

6.5 - VRP 350 BLIZZARD SPECIAL HIGH POWER

Machine for I use Professional. A special turbine to most high pressure and a new motor from 4HP to 380V allow launch to beyond 25 meters 50Kg. of confetti to the minute to continuous use. One great cloud of confetti in order to cover one immense area. Devised for the fields sportswomen and manifestations in the open air or meeting today is placed to concerns us of the category for its simple and effective realization. The machine and on one fortified base of 4 wheels 2 with brake. The new ejector to shape of conical gun with tube Venturi lucks to the base offers a great visual impact. The machine can be uniform in three parts for the transport. TThis equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark. he machine comes sold in offer with the **SNOW KIT** is order one products for two different effects



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	2200 Watt
Power supply cable	Included
Use	Non stop
Color	Black / Blue
Dimensions	162 x 55 x 85H cm
Weight	55 Kg

6.6 - APF 350 BLIZZARD AUTOMATIC 0/10 V

This model has the same technical characteristics as the APF 350 model, in addition there is a recharge funnel with an endorser for dosing confetti in low pressure 0\10V complete with remote control, a wire 5m long and a stand complete with pivoting wheels two with breaks, the container can contain a max of 3 Kg. of confetti. A high performance, professional machine to shoot, more than 15 metres away, either round confetti with a diameter of 5 cm or strips of 1.5 x 5 cm., thanks to the power of its 3HP engine with blades rotating forwards in a frame of aluminium that looks like a huge hair dryer. This machine is formed by 3 parts: first the base on which the engine is positioned, second the engine itself and third the Venturi tube joined to the engine by a mechanical ring nut to enable a shooting inclination from 0 to 45°. Thanks to the special engine, the special worked out design, is based on theoretical and practical calculations of aero hydraulics, this machine can continuously shoot up to 3 Kg. of confetti per minute to more than 15 metres away. This machine doesn't need any maintenance at all. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	2200 Watt
Power supply cable	Included
Use	Non stop
Color	Black / Blue
Dimensions	162 x 55 x 85H cm
Weight	55 Kg

6. CONFETTI MACHINE

6.7 - APF 350 MONSTER

Machine for I use Professional. A special turbine to most high pressure and a new motor from 5.5HP to 380V allow launch to 30 meters 50Kg. of confetti to the minute to continuous use. One great cloud of confetti in order to cover one immense area. Planned for the fields sportswomen and manifestations in the open air or meeting today it is placed to you concern us of the category for its simple and effective realization. The machine and on one fortified base of 4 wheels 2 brake. The new ejector to shape of conical gun with tube Venturi locks to the base offers a great visual impact. The machine can be uniform in two fields. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark. The machine comes sold in offer with the **SNOW KIT** is order one products for two different effects



TECHNICAL CHARACTERISTIC	
Power supply	380 Vac / 50 Hz
Power	4000 Watt
Power supply cable	Included
Use	Non stop
Color	Black / Blue
Dimensions	54 x 192 x 235H cm
Weight	72 Kg

6.8 - RAIN PLUS

It plots it launches ceiling corianders conceived for great events and demonstrations where the silence and the space are narrow. A particular design and a correct compromise make the product a lot of accattivante and creative.

The car works with a special silent fan that pushes upward the corianders forcing only the exit from the external circumference of the reservoir, the corianders so launched they create an effect very real rain.

The quantity of corianders varies to according to of the form and of the support of which I/you/they are composed.

The car consumes around 1 kg. of corianders to the minute, even if loading at the most the car the first throwing will surely be more abundant.

Built in symbiosis with galvanized steel and painted to dusts and vase plastic brown color.

The car can launch only also the corianders for 180° and not for 360° enough it asks for the special deflector for the reduction of the angle of exit.

The car positioned to 5 meters high creates a diffused rain that to respect and of around 5 meters diameter.

Speed of the motor fixed fan, but with possibility to be regulated through special regulator on purpose studied for the use of this car.

Shortly you/he/she will be set in sale the model with card in DMX.

I consume quantificabile in 250W to 230V 50Hz.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	250 Watt
Power supply cable	Inclucec
Use	Non stop
Color	Black
Dimensions	72 x 85H cm
Weight	21 Kg

7. CONTROLLER LED RGB

7.1 - CONTROLLER RGB 12 CH / DMX 512 MAXI



Centralina of pilotage Led RGB in DMX 512 12 CHs 1° to the World new Line P&P, the centralina manages up to 100 linear meters Strip Led RGB 12V in maximum length of 25 meters for exit. Display to 7 red segments, management through pulsating formulation channel, signaling wrong polarity. Invertitore of polarity. Back connections through taken connectors Speakon. Loom with angular profile radiated in patented aluminum with inside takings of air and plate in steel, is not present openings in the plates. Inside feeder Switching 12V Dc from 500W. Management through microprocessor of the functions of miscelazione of the colors. Product conforming to the prescriptions of the directive LVDs-EMC-RoHS-Us. Recorded and patented model.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz a richiesta)
Power	500 Watt / 12 VDC
Cable power supply	Included
Color	Grey / Black opaque, dusts varnish
Dimension	49 x 40 x 14H cm
Weight	10 Kg

7.2 - CONTROLLER RGB DMX 512

Power to control Led Rgb in dmx 512, display a bright red 7 segments for viewing channel allocation dmx, 3 ch.

Maximum 4 amp per channel.

Power 12 Vdc or 24 Vdc.

Possible connection unit Dmx via connectors canon panel 3 poles or wire through Terminal 3 to pull wires.

This product is used to be installed on the ceiling or near the Led and then by setting the channel controlled by central Dmx in directing.

Product training in plastic houses Abs resistant black and white panel, switch On Off.

Product complies with the existing directives LVD EMC RoHS. EC



TECHNICAL CHARACTERISTIC	
Power supply	12 / 24 Vcc
Power	4 strip 5 mt.
Power supply cable	Inclucec
Color	Black & Withe
Dimensions	19 x 12 x 6H cm
Weight	0.5 Kg

7. CONTROLLER LED RGB

7.3 - CONTROLLER RGB DMX 512 MAXI



Drive for control Led Rgb in Dmx 512,
 Bright Display to 7 segments for visualization channel of assignment dmx
 3 ches dmx
 Maximum load 15 amps
 Feeding 12Vdc or 24Vdc
 possibility of connection to centralina Dmx by connectors canon mlf from panel to 3
 poles or to thread through terminal block to 3 threads estraibile
 This product serves to be installed to ceiling or in the proximities of the Leds and then
 through formulation of the controllable channel from centralina Dmx in regal.
 Professional product in the houses of allumino with holes of airing and forced
 ventilation to half fan to 12V Vdcs.
 Possibility of it asks for inside feeder from 500W 12Vdc our products I am conforming
 to the prescriptions of the directive LVDs - EMC - RoHS (Us).



TECHNICAL CHARACTERISTIC	
Power supply	12 / 24 Vcc
Max power	6 strip of 5 mt.
Power supply cable	Included
Color	Black
Dimensions	25 x 15 x 20H cm
Weight	3 Kg

7.4 - CONTROLLER LED RGB

Management control for Ler Rgb or color, diplay Lcd 2 rows 16 characters, blue with white writing.

Maximum cargo 4 amp per channel.

Power 12 Vdc or 24 Vdc.

Products designed for choreographic scenic effect for local public entertainment or night club, where you want to interact on a light second pitch and nuance generated by diode Led Rgb.

The controller allows you to store scenes fade and fade as well as execution time.

It can adjust the color and its variants RGB.

The memory and 60 scenes with a time varying from 1 to 255 seconds for the fader scene has time execution from 0.5 to 12.5 seconds

(Fade slider black)

Product training in plastic houses Abs resistant black and white panel.

Product complies with the existing directives LVD EMC RoHS EC



TECHNICAL CHARACTERISTIC	
Power supply	12 / 24 Vcc
Max power	4 strip to 5 mt.
Power supply cable	Inclucec
Color	Black
Dimensions	19 x 12 x 6H cm
Weight	0.5 Kg

8. STRIP LED

TUBE WATERPROOF LED STRIP LIGHTING

WATER-TIGHT, USED IN COLD WATER

Use: Waterproof, indoor and outdoor

Length: 3 or 5 meters

Controller on request for RGB



The LEDs are used more and more in circle I illuminate technical and of Show, they represents the constant evolution of new innovative techniques developed in the field of the illumination both civilian how industrial and of the Professional Show Live.

Today various types of LED that allow angles of field that have varied since 4° to the 120° and a bright surrender equal to the incandescence lamps exist, over whether to have the advantage of a greater surrender and constancy of the chromatic surrender and a smaller dispersion of heat that it doesn't send forth the rays IR and UV.

Not and present in the LEDs the mercury.

The various feeding from 3 to 24 Vdcs.

They ignite through feeders Switching.

Quality of issue of saturated colors, creations of dynamic colors with variation of color RGB, lasted of operation over 50.000 hours, possibility to add opticse to tall surrender in plastics.

Operation in safety because in low tension, lighting without vibrations and to low temperatures up to - 40° without problems.

The duration of life of the LED is not influenced by the number of accensioni/spgnimenti.

Costs of maintenance don't exist, united to a high-performance, if compared lamps and alogene to the incandescence.

I include some diagrams of light that underline the possibilities of endless of variations of colors and obtainable tones with the LEDs RGB.

COMMON WATERPROOF LED LIGHTING STRIP

ONLY FOR RGB

12 v, 60 LED/mt, 120° PVC

Dimension : 500 x 10 mm

Net weight: 60 g.

Water proof. IP65

Use: Waterproof, indoor and outdoor, not in water

Length: 3 o 5 meters

12 v, 30 LED/mt, 120° PVC

Dimension: 500 x 12 mm

Net weight: 60 g.

Water proof.: IP65

Use: Waterproof, indoor and outdoor, not in water

Length: 3 o 5 metri

Controller RGB on request

STRISCE LED LUMINOSE STAGNE

12 v, 60 LED/mt, 120° PVC

Dimension : 500 x 10 mm

Net weight: 60 g.

Water proof: IP68

Use: STAGNO, IN ACQUA FREDDA

Uso: Impermeabili, esterno, interno

Lunghezza: 3 o 5 metri

Controller a richiesta per RGB

9. ACCESSORIES

9.1 - SWITCH ON / OFF 1-4 CH - DMX 512

Switch On/Off Dmx 512 new Line P&P, manages a power up to 3000 Watts. Versions to 1ch, 2 ches, 4 ches with feeding unbalanced trifase. Entry and exit through thread, fuse of protection. Connections Dmx to 3 poles canon to application 5 poles. Display to 7 red segments, management through pulsating formulation channel, signaling wrong polarity. Invertitore of polarity. Loom with angular profile radiated in patented aluminum with inside takings of air and plate in steel, is not present openings in the plates. Product conforming to the prescriptions of the directive LVDs-EMC-RoHS-U.s. Recorded and patented model.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	3000 Watt
Power supply cable	Included
Output cable	Included
Color	Alluminium raw
Dimension	18 x 413 x 13H cm
Weight	2 Kg

9.2 - MACCHINA DEL VENTO

This construction is designed for cinematographic studies and television in order to simulate a wind effect, the machine constructed with a fan from 3HPcon impeller to 8 adjustable shovels in aluminium allows it to obtain air and ventilation demanded to a situation. The fan comes lodged on a base that acts as a pedestal and can be moved by the 4 wheels with brakes placed under of it. While operating this fan it is also possible to regulate $+35^{\circ}$ - -35° on the axis which serves in order to launch or to push out the balloons to a remarkable distance. Recorded and patented model.

This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	220 Watt
Color	Black
Dimensions	60 x 45 x 1200/200 cm
Weight	40 Kg

9. ACCESSORIES

9.3 - VENTILATORE MINI FUN

Fan assiale from the redoubts dimensions and weight, his/her use for photographic studies, cinema set, television, stage fashion and parades, the meeting place noise they make him/it an essential tool to produce the wind. You/he/she can be used in combining to a car smoke to create different and of expansion of the smoke. Stirrup in steel both for connection to American and inverse structure for mobile stativo. To application of electronic circuit for the regulation of the speed to like through potenziometro. Our products are conforming to the prescriptions of the directive LVDs - EMC - RoHS (Us). recorded and patented Model.



TECHNICAL CHARACTERISTIC	
Power supply	230 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Power	115 Watt
Color	Black
Sound pressure level db(A)	69 db(A)
Dimensions	27 x 30 x 42H cm
Weight	6 Kg

9.4 - VENTILATORE PER AIR TUBE

Fan built for Air Tube sheet steel 12 \ 10 painted with epoxy powder and fan motor coupled axis in order to obtain a uniform in diameter ventilation and push the object inflated according to its construction from a minimum of 8 meters to a maximum of 12 metres. Speed 2800 rpm engine bearings designed with high-speed car lubricants for the slightest noise rotation impeller blades to Pvc reinforced with angle of inclination not fixed adjustable. Possibility of motorization v 50 to 380 hz and inverter pilotage. Color glossy black seeds resistant, surface using steel ring with holes in the whole circumference. Our products meet the requirements of the directives LVD - EMC - RoHS (EC). Model registered and patented



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (380 Vac / 50 Hz on demand)
Power	750 Watt
Color	Black
Dimensions	45 x 56 x 59H cm
Weight	24 Kg

9. ACCESSORIES

9.5- ROTOR BOX

A ROTOR BOX containing a ratiomotor, with alternate current AC and double way rotor with double brushes and special charcoals for non stop usage. This device enables the rotation of whatever lighting system by 360°, with fixed spin velocity of 20 RPM. A feeding connector is provided with 1 protection plus 1 spare fuse. The maximum applicable power is 10 Amp. With voltage rating of 230V 50Hz. A fixing plate for walls or ceilings can be supplied on demand. ROTOR BOX can be used together with the snow machine SNOW JET to get a 360° snowfall with an 8 metre diameter. This equipment complies with the essential requirements of the European Union directive LVD - EMC - RoHS - CE and safety regulations. Patented model and registered trademark



TECHNICAL CHARACTERISTIC	
Power supply	220 Vac / 50 Hz (120 Vac / 60 Hz on demand)
Max Power	10 A
Rotor	20/12 rpm
Power supply cable	Included
Color	Black
Dimensions	30 x 25 x 12H cm
Weight	4.3 Kg

10. TANKS AND JOIN



ELECTRICAL VALVE FOR SNOW JET, SNOW JET 0 10 V ELECTRONIC, SILENCE DMX 512



COMPLETE TAP FOR SNOW JET, SNOW JET 0 10, ELECTRONIC, SNOW JET SILENCE DMX 512, SNOW JET 80 DBA



FLUSH REGULATOR FOR SUPERBIG MK2- MINI CANNONE FUN - GIUBILEUM II FUN



FLUSH REGULATOR FOR BLIZZARD STORM, BLIZZARD TWISTER- FOAM MILLENNIUM 202



5 L TANK FOR SNOW JET, SNOW JET 0 10 V, SNOW JET SILENCE 80 DBA



SMOKE MACHINE TANK ALL MODELS



5 L TANK FOR SNOW JET, SNOW JET 0 10 V, SNOW JET SILENCE 80 DBA

11. IMMERSION PUMPE

PUMPE 1



PUMPE 2



PUMPE 3



12. WELLS MOTOR BASE

WHELLES MOTOR BASE



WHELLES MOTOR BASE



13. BLADE



ROLLING STONE Blade




ROLLING STONE Blade DOUBLE CROWN



Transformation kit to MINI MAXI at MAXI MK2



Transformation kit to MAXI MK2 at MINI MAXI



Evoluzione ABS Blade

14. LIQUID FOR BUBBLE



SHOW BUBBLE ready to use 5 litre tank Specific product for machines that generate soap bubbles Colour Blue Product does not mark and does not cause irritation to eyes and skin Product is Dermatologically tested Do not dispose of product incorrectly as to preserve the environment Confection of four 5 litre tanks



CONCENTRATED SHOW BUBBLE Product for professional use only Concentrated liquid to dilute 1:4 colour blue (example, mix 1L of concentrated liquid + 4 litres of water so obtain 5 litres of ready to use liquid) Please ensure protective glasses & gloves are used when diluting the liquid Do not inhale Keep out of reach of children This liquid should only be used for machines that generate soap bubbles Please follow instructions carefully Do not dispose of product incorrectly as to preserve the environment Product is sold in 25 litre tanks



BUBBLE GIANT ready to use 5 litre tank Specific product for machines that generate soap bubbles Specific liquid for ROLLING STONE - ROLLING STONE FUN machines Colour yellow Product does not mark and does not cause irritation to eyes and skin Product is Dermatologically tested Do not dispose of product incorrectly as to preserve the environment Confection of four 5litre tanks



CONCENTRATED BUBBLE GIANT Product for professional use only Concentrated liquid composed of three 5litre tanks of solution a and 1 tank of 3 litres of solution B (to prepare mix 82 litres of water first with solution a and after mixing add in solution b to obtain 100 litres of ready to use liquid). Please ensure protective glasses & gloves are used when diluting the liquid. Do not inhale. Keep out of reach of children. This liquid should only be used for machines that generate soap bubbles ROLLING STONE- ROLLING STONE FUN. Please follow instructions carefully. Do not dispose of product incorrectly as to preserve the environment. Sold in 18 litre confections. It is possible to use ready to use liquid BUBBLE GIANT for all bubble machines, but it is not possible to use liquid



BUBBLE GIANT FLUORESCENT ready to use 5 litre tank Specific product for machines that generate soap bubbles Produces soap bubbles that react against black wood lights Colour yellow/green, Product does not mark and does not cause irritation to eyes and skin Product is Dermatologically tested Do not dispose of product incorrectly as to preserve the environment Confection of four 5litre tanks

15. LIQUID FOR FOAM



CONCENTRATE SHOW Foam Product for professional use only Liquid in a concentrated solution to dilute at 2% colour yellow (example: 2l of concentrated solution + 98l of water to obtain 100 litres of ready to use product) Please ensure protective glasses & gloves are used when diluting the liquid Do not inhale Keep out of reach of children This liquid should only be used for machines that generate soap flakes Please follow instructions carefully Do not dispose of product incorrectly as to preserve the environment Sold in 25 litre tanks



SHOW FOAM ready to use 25litre tank Specific product for foam machines Colour Cristal, Product does not mark and does not cause irritation to eyes and skin Product is Dermatologically tested Do not dispose of product incorrectly as to preserve the environment Confection of four 5litre tanks

16. LIQUID FOR SMOKE



SHOW SMOKE is a fog fluid produced in conformity within European Laws, it is non-toxic and not dangerous to the health.
Supplied in 5 lt. tank (packaged 4 pcs x box)

17. LIQUID FOR SNOW






SHOW SNOW ready to use 5 litre tank Specific product for snow machines Colour Cristal, Product does not mark and does not cause irritation to eyes and skin Product is Dermatologically tested Do not dispose of product incorrectly as to preserve the environment Confection of four 5litre tanks




CONCENTRATE SHOW SNOW Product for professional use only Liquid in a concentrated solution to dilute at 5% colour Cristal (example: 250ml of concentrated solution + 4.750 ml of water to obtain 5 litres of ready to use product)
Please ensure protective glasses & gloves are used when diluting the liquid Do not inhale Keep out of reach of children This liquid should only be used for machines that generate snow. Please follow instructions carefully
Do not dispose of product incorrectly as to preserve the environment Sold in 25 litre tanks

18. CONFETTI



18. CONFETTI

	...01		...09		...18
	...02		...11		...19
	...03		...12		...21
	...04		...13		...49
	...05		...14		...54
	...06		...15		...58
	...07		...16		...72
	...08		...17		Assortiti Assorted

19. BATTERY



BATTERY



CHARGE BATTERY

